

## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
28 July 2005 (28.07.2005)

PCT

(10) International Publication Number  
**WO 2005/068750 A1**

(51) International Patent Classification<sup>7</sup>: **E04H 12/00**,  
12/02, 12/04, 12/08, 12/12, 12/22, 12/32, E02D 27/42

(21) International Application Number:  
PCT/AU2004/001733

(22) International Filing Date:  
10 December 2004 (10.12.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
2004900120 13 January 2004 (13.01.2004) AU

(71) Applicant (for all designated States except US): **POWER  
BEAM PTY LTD** [AU/AU]; 6 Sonia Street, Donvale, Vic-  
toria 3111 (AU).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **KNIGHT, John,  
Keith** [AU/AU]; 6 Sonia Street, Donvale, Victoria 3111

(AU). **RANDELL, Robert, Edwin** [AU/AU]; 6 Dion  
Street, Ferntree Gully, Victoria 3156 (AU). **CHELL,**  
**Carmel, Geraldine** [AU/AU]; 5 Renou Road, Wantirna  
South, Victoria 3152 (AU).


(74) Agents: **PERNAT, Alfred** et al.; Morcom Pernat, Suite 2,  
334 Highbury Road, Mount Waverely, Victoria 3149 (AU).

(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,  
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,  
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,  
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,  
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,  
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,  
ZW.

(84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,

[Continued on next page]

(54) Title: BRIDGING BEAM

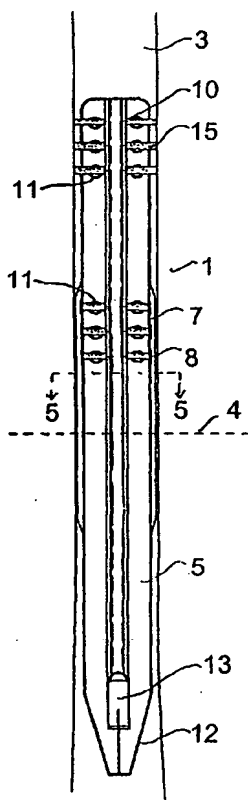

(57) Abstract: A method of reinstating a pole (3) standing upright in ground (4) comprising, abut-  
ting an inner surface of a sleeve (5) of a bridging beam (1) against an outer surface of the pole so  
as to have a lower portion of the bridging beam penetrating the ground and an upper portion of  
the bridging beam projecting above the ground, arranging a plurality of locating members (24)  
around the outer surface of the pole, and securing the bridging beam to the pole by strapping (15)  
surrounding the pole held in place with respect to the pole by the locating members.

WO 2005/068750 A1



GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

— with international search report

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*